



C-Frame Systems


Tuff Built by Diversified mobile C-Frame Systems is a versatile and portable fall arrest solution for working at heights.

The light weight of portable C-Frames allow the fall arrest system to be moved manually or for units with integrated stair systems, a fork lift.



C-Frame fall protection systems are ideal for applications with some clearance under the equipment being accessed to accommodate outrigger support legs. Available in fixed and adjustable heights configurations with optional access stair systems, the portable C-Frame fall arrest systems are fully compliant with OSHA fall protection regulations.

Part #	Model	W (width Inside)	APH (Anchor Point Height)	OH (Overall Height)	L (Length)	OW (Overall Width)	# of Rails	# of Anchors	Wheels	Weight	Price
70033	SXS Pro-3, 9W-25H-1R-2A-RM	9'-0"	25'-5"	26'-9 1/2"	16'-1/2"	10'-6"	1	2	Rubber Molden	1975lbs/ 898kgs	
50090	SXS Pro-3, 15W-20H-1R-2A-RM	15'-0"	20'-1"	21'-3 3/4"	16'-0"	16'-6"	1	2	Rubber Molden	2015lbs/ 916kgs	
70382	SXS Pro-3, 20W-19H-1R-2A-U	20'-0"	19'-0"	21'-8"	17'-9 1/2"	21'-3"	1	2	Urethane	1700lbs/ 773kgs	

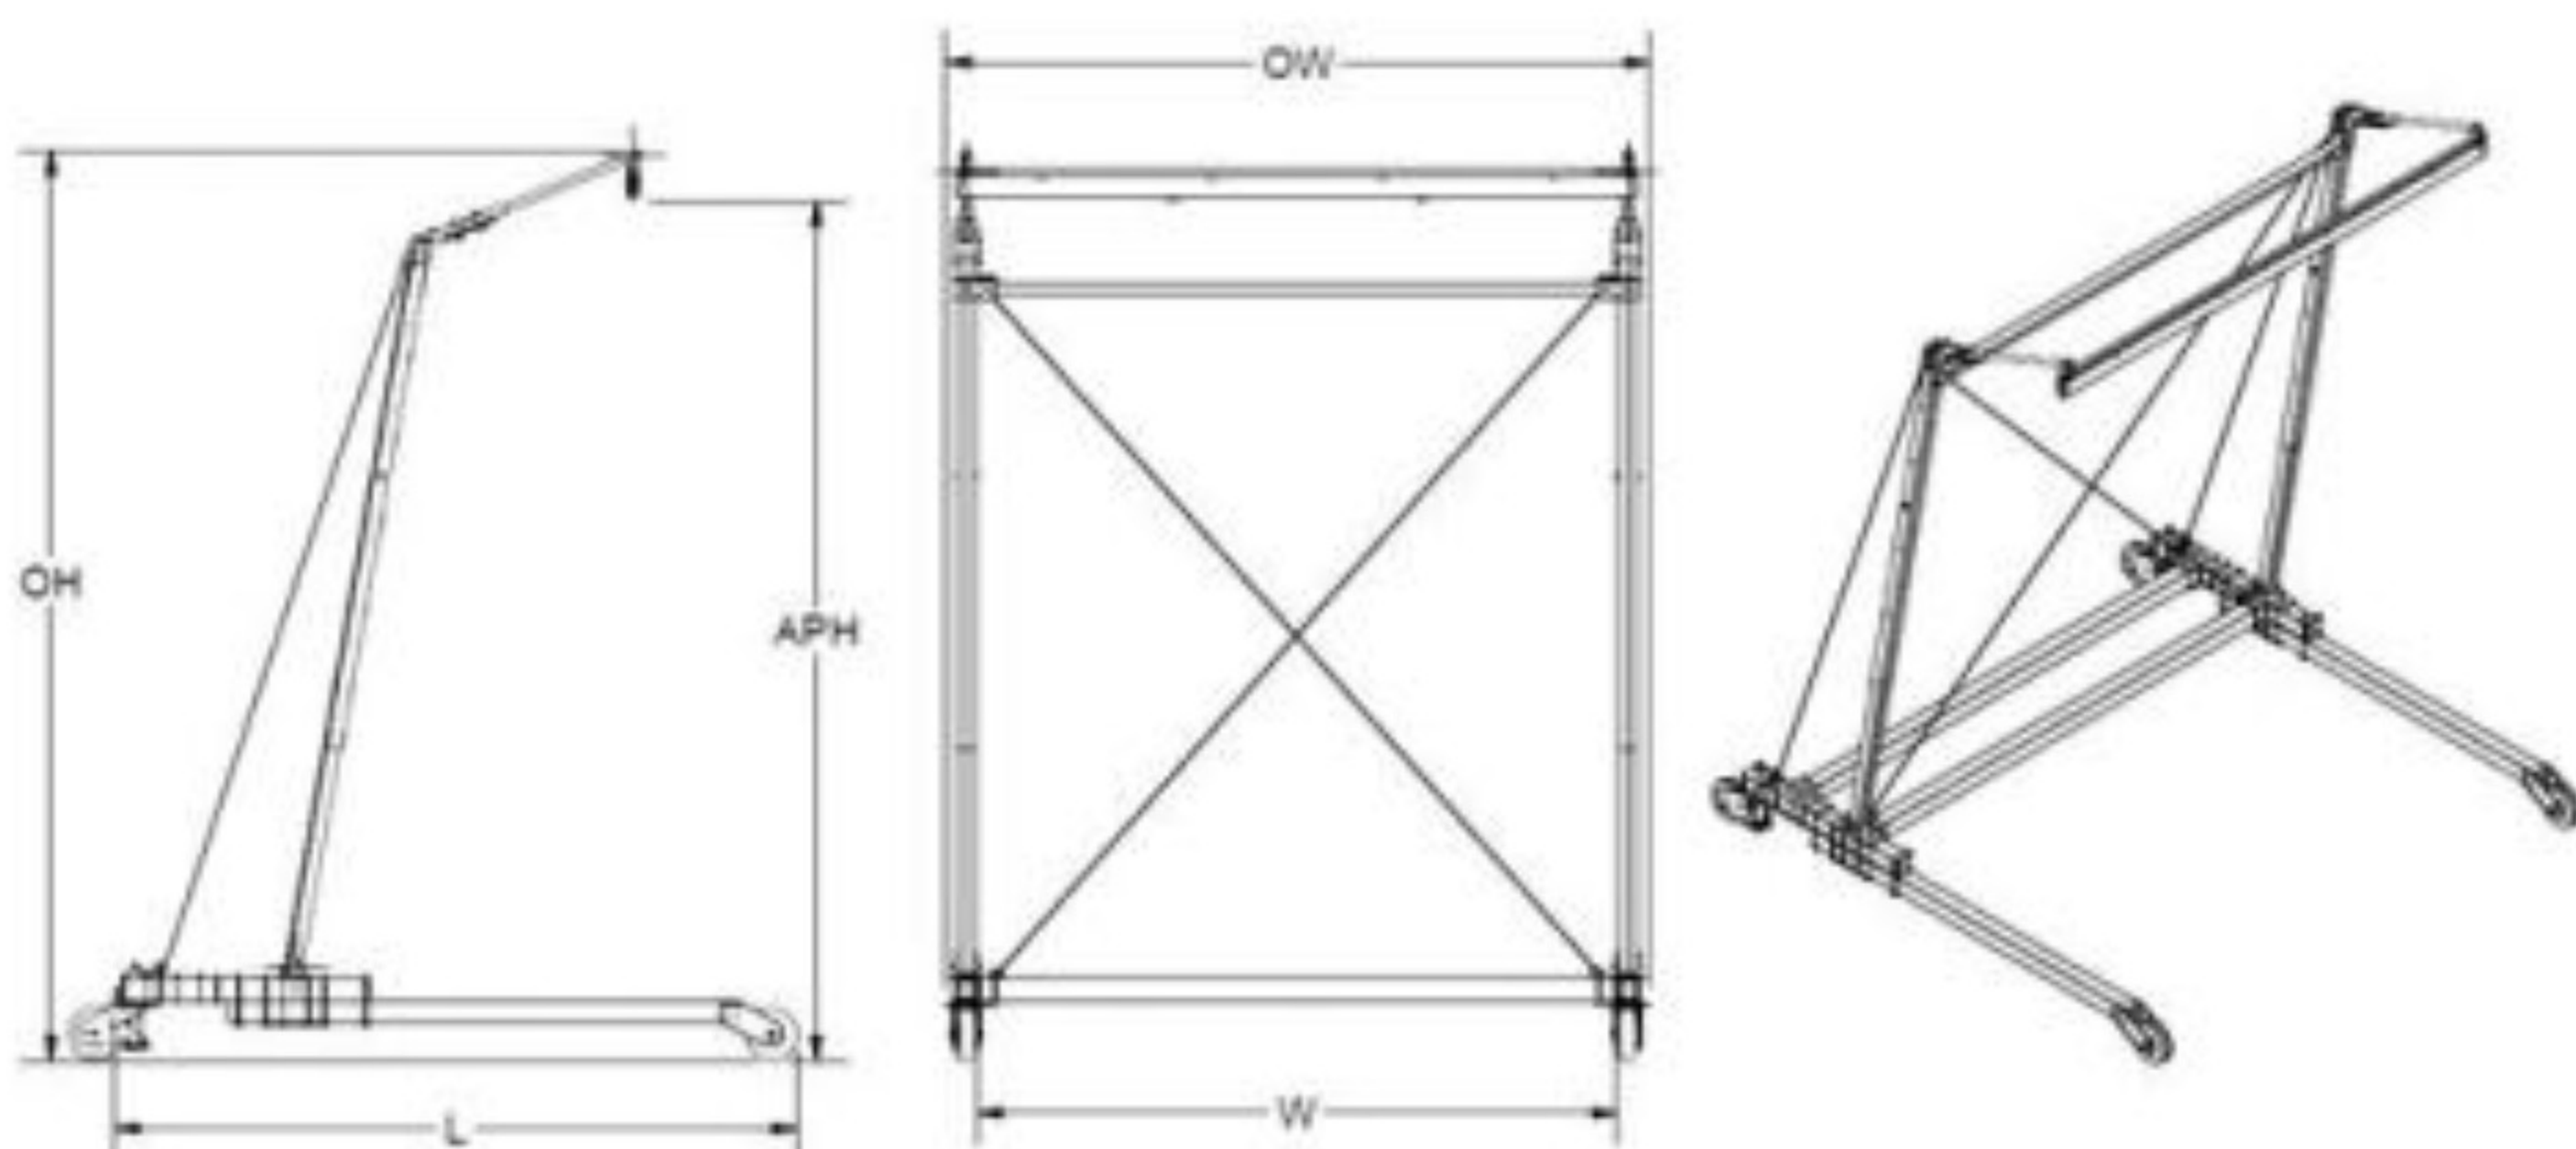

Mailing Address:

22400 Sperry Drive

Westlake OH, 44145

Toll Free: 1-800-504-4016

Tel: 1-400-348-9460


Email: info@fallprotect.com



C-Frame Systems

- Mobile Horizontal Rail Systems roll up to elevated work surfaces and provide mobile anchor points for fall protection along the length of an elevated area.

Part #	Model	W (width Inside)	APH (Anchor Point Height)	OH (Overall Height)	L (Length)	OW (Overall Width)	# of Rails	# of Anchors	Wheels	Weight	Hydraulic Controls	Price
50007	SXS Pro-5, 10W-12/18H-1R-1A-RM	9'-6"	12'-4" to 18'-6"	13'-8" to 19'-10"	14'-10"	12'-0"	1	1	Rubber Molden	2320lbs/ 1055kgs	Manual	
50040	SXS Pro-5, 15W-20/34H-2R-2A-RM	15'-0"	20'-0" to 33'-9"	21'-11" to 35'-9"	16'-5"	16'-6"	2	2	Rubber Molden	3525lbs/ 1602kgs	Manual	
70381	SXS Pro-5, 20W-19/33H-1R-2A-U	20'-0"	18'-9 1/2" to 32'-11"	20'-8" to 34'-9"	17'-10"	21'-3"	1	2	Urethane	3000lbs/ 1364kgs	Manual	

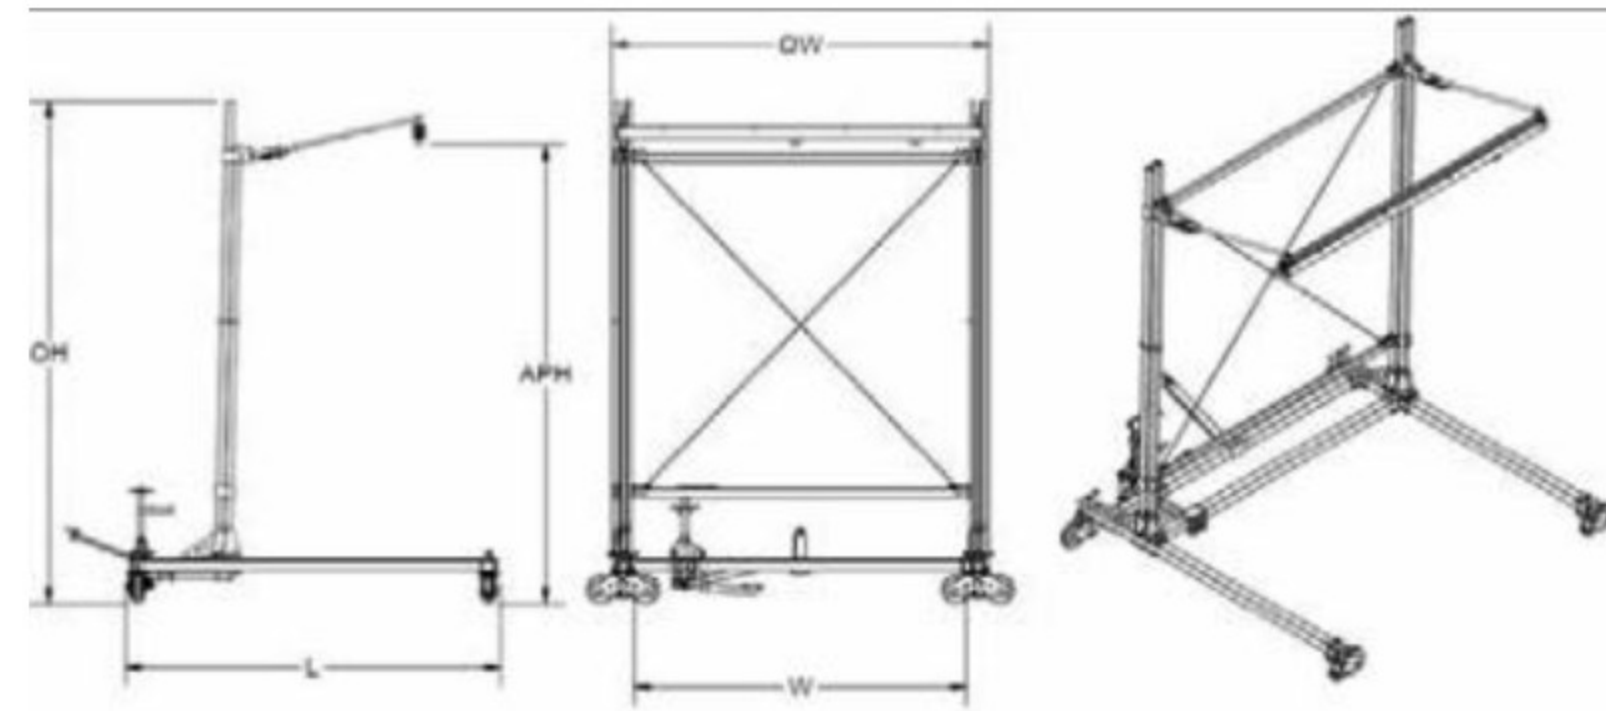

Mobile Horizontal Rail Systems may be fixed or adjustable in height. In addition, ***an access stair system with entrance platform*** can be incorporated to provide ground-up fall protection for your elevated work activities.

The below part numbers represent systems that include entrance platforms:

Part #	Model	W (width Inside)	APH (Anchor Point Height)	OH (Overall Height)	L (Length)	OW (Overall Width)	PH (Platform Height)	# of Rails	# of Anchors	Wheels	Weight	Price
70103	SXS Pro-4, 20W-25H-1R-1A-RM	19'-0"	25'-7"	26'-11"	16'-1/2"	20'-6"	9'-0" to 16'-8"	1	1	Rubber Molden	3050lbs/ 1387kgs	

Part #	Model	W (width Inside)	APH (Anchor Point Height)	OH (Overall Height)	L (Length)	OW (Overall Width)	PH (Platform Height)	# of Rails	# of Anchors	Wheels	Weight	Hydraulic Controls	Price
50025	SXS Pro-6, 10W-19/24H-1R-1A-U	9'-0"	18'-5" to 24'-0"	19'-9" to 25'-3"	16'-8"	12'-0"	8'-9" to 13'-10"	1	1	Urethane	2720lbs/ 1236kgs	Manual	

