




## Portable Truss Anchor Kits

**Fast and easy fall  
protection where  
and when you  
need it!**

### Compliance, made portable.

Portable truss anchor kits are the easy, cost-effective alternative to permanent single-point anchors. They connect to your existing overhead truss system without requiring penetrating installation and install in minutes.

- OSHA 1926.502, 1910.140 and ANSI Z359.1 compliant
- Fast and easy installation
- 310 lb. single user rating
- Compatible with K, KCS, LH, and DHL series open web steel joists

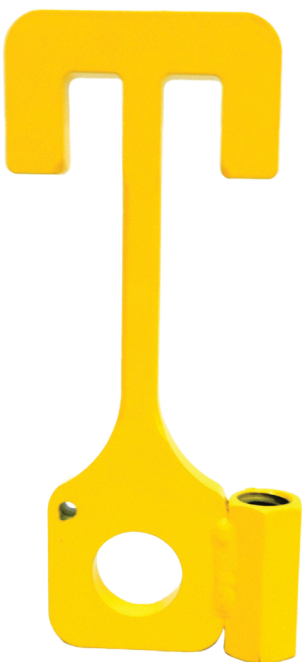

**DIVERSIFIED**  
FALL PROTECTION

**Elevating safety standards**

**fallprotect.com**


24400 Sperry Drive  
Westlake, OH 44145

## How to install Portable Truss Anchor Kits



Installation is simple.

First, thread the anchor on the telescoping extension pole included with the kit.


Attach the self-retracting lifeline.



Position the anchor between the bottom truss cord angles.



Rotate 90 degrees and set on the angles.



### Available anchor kit options

Choose from two lifeline lengths and your choice of with or without body harness.

KIT NUMBER	SELF-RETRACTING LIFELINE	BODY HARNESS
PTAR11W	11'DBI/SALA Rebel Web SRL	Not included
PTAR11WH	11'DBI/SALA Rebel Web SRL	DBI/SALA Delta Harness
PTAR20W	20'DBI/SALA Rebel Web SRL	Not included
PTAR20WH	20'DBI/SALA Rebel Web SRL	DBI/SALA Delta Harness

\*All kits include an OSHA-compliant portable truss anchor, SRL, 18' telescoping installation pole, and user manual.



### Important safety notes

Truss anchor locations must be approved by a safety engineer or qualified person and meet all safety requirements noted in the user manual.

Anchors should be located between two panel points, as close as possible to panel points.

- Do not install at the end of a truss
- Do not install between first and second panel point

Truss span must be able to withstand a concentrated load of 900 lbs. with a safety factor of 2 for certified anchorages and 5,000 lbs. for non-certified anchorages.

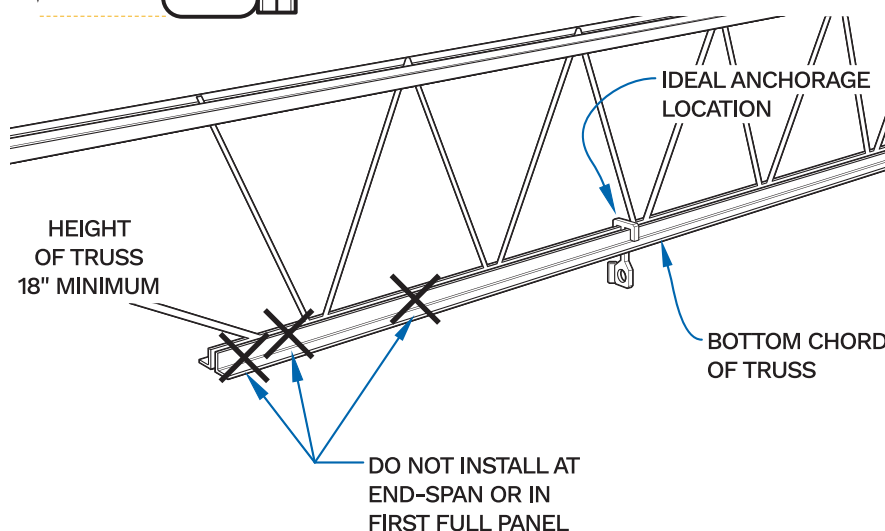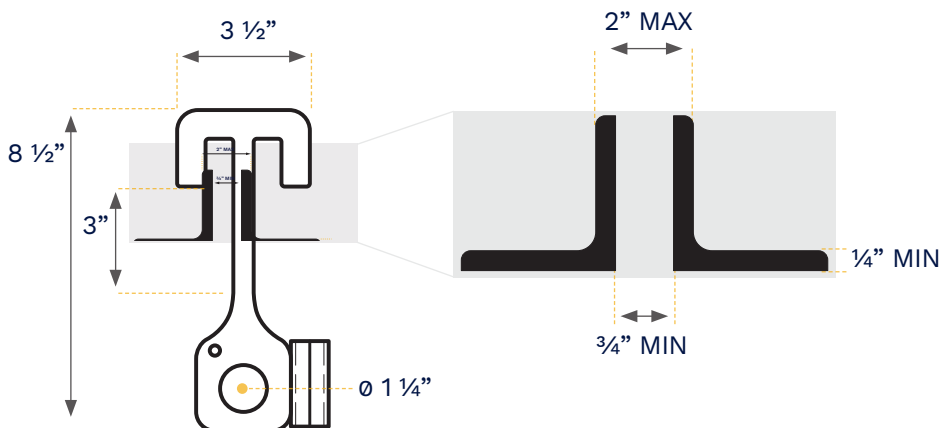

For more information,  
talk to a fall protection specialist  
at (800) 504-4016.