




Fall Protection

# Engineered anchor points for unique work environments.

## 3M™ DBI-SALA® Flexiguard™ A-Frame

The A-Frame System is a mobile and versatile solution designed to be positioned manually. The freestanding design straddles the work surface, taking up minimal floor space. Available in adjustable height and fixed height models, this two-user solution can be utilized for a wide variety of applications.

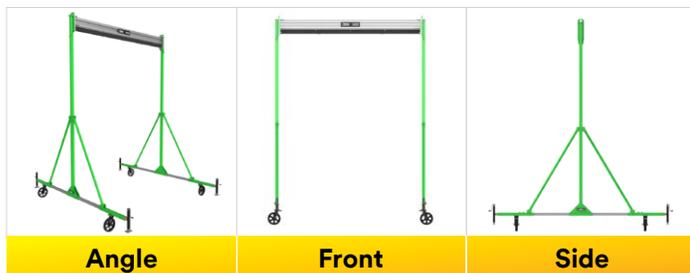

### Features:

- ▶ System contains a single rail rated for two users.
- ▶ User weight: 310 lbs. (141 kg) or less.
- ▶ Systems include heavy-duty leveling jacks.
- ▶ Lightweight aluminum construction.
- ▶ Portable design that can be moved easily.
- ▶ Four integrated swiveling wheels.
- ▶ Adjustable Height Models.
- ▶ Adjustable using an overhead crane, forklift or powered system.
- ▶ Integrated pin-height selection system.

### Target Applications:



Mining

- ▶ Heavy equipment maintenance



General industry

- ▶ Heavy manufacturing



Defense



- ▶ Aircraft
- ▶ Helicopters
- ▶ Heavy vehicles



Complies with EN795:2012 | CEN/TS 16415:2013

Conforms to the requirements of 29 CFR OSHA 1910.140 | 29 CFR OSHA 1926.502

For use in Canada, please review applicable provincial regulations.

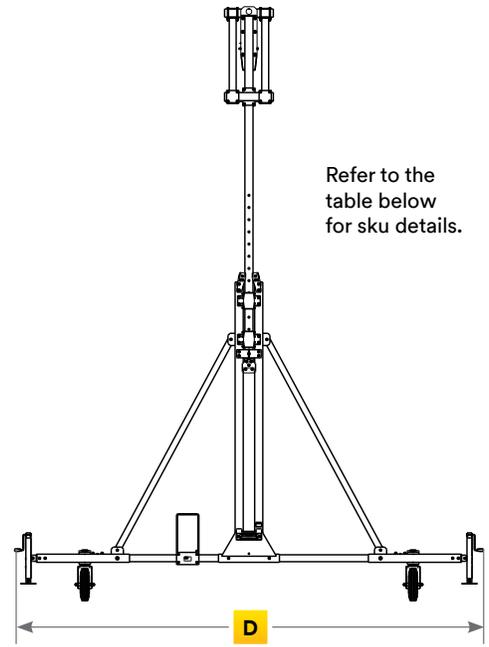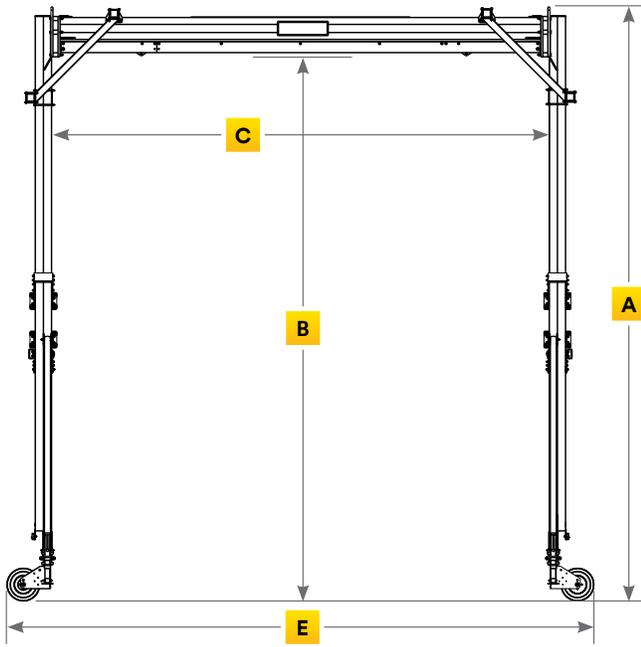

Refer to the table below for sku details.

## Accessories



**8529744**  
Converts wheels (qty. 4 required) to 16 in. (0.4m) foam filled pneumatic tires. (Fixed height A-frame systems only.)



**8547277**  
Grounding reel and bracket kit.

Fixed Height Models									
SKU	Global Standard	Weight	"A" Overall Height	"B" Anchor Height	"C" Trolley Rail Width	"D" Base Length	"E" Base Width	OSHA/ANSI SRL Rating	CE SRL Rating
8560027	*OSHA/CE	1,230 lb (560 kg)	17' (5.2m)	15' (4.6m)	15' (4.6m)	19'2" (5.8m)	17' 4" (5.3m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560028	*OSHA/CE	1,380 lb (628 kg)	17' (5.2m)	15' (4.6m)	20' (6.1m)	19'2" (5.8m)	22' 4" (6.8m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560029	*OSHA/CE	1,540 lb (700 kg)	17' (5.2m)	15' (4.6m)	30' (9.1m)	19'2" (5.8m)	32' 4" (9.9m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560030	*OSHA/CE	1,530 lb (695 kg)	22' (6.7m)	20' (6.1m)	15' (4.6m)	19'2" (5.8m)	17' 4" (5.3m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560032	*OSHA/CE	1,220 lb (555 kg)	22' (6.7m)	20' (6.1m)	20' (6.1m)	19'2" (5.8m)	22' 4" (6.8m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560033	*OSHA/CE	2,172 lb (987 kg)	22' (6.7m)	20' (6.1m)	30' (9.1m)	19'2" (5.8m)	32' 4" (9.9m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560034	*OSHA/CE	2,160 lb (982 kg)	32' (9.8m)	30' (9.1m)	15' (4.6m)	19'2" (5.8m)	17' 4" (5.3m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560036	*OSHA/CE	2,240 lb (1018 kg)	32' (9.8m)	30' (9.1m)	20' (6.1m)	19'2" (5.8m)	22' 4" (6.8m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8560021	*OSHA/CE	2,420 lb (1,100 kg)	32' (9.8m)	30' (9.1m)	30' (9.1m)	19'2" (5.8m)	32' 4" (9.9m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)

16" (0.4m) rubber molded wheels.

\* Complies with EN795.2012 | CEN/TS 16415:2013.

Adjustable Height Models								
SKU	Global Standard	Weight	"A" Overall Height	"B" Anchor Height	"C" Trolley Rail Width	"D" Base Length	"E" Base Width	OSHA SRL Rating
8517780	OSHA	3,160 lb (1391 kg)	17' 11"-24' 5" (5.5m-7.4m)	16"-22' 6" (4.9m-6.8m)	20' (6.1m)	19'3" (5.9m)	24' 1" (10.4m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF
8517781	OSHA	3,222 lb (1464 kg)	17' 11"-24' 5" (5.5m-7.4m)	16"-22' 6" (4.9m-6.8m)	30' (9.1m)	19'3" (5.9m)	34' 1" (10.4m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF

16" (0.4m) foam filled wheels.

Adjustable in height ever 6" (0.15m) using locking pins.

Find complete product information at [3M.com/FallProtection](https://www.3m.com/FallProtection).



3M Fall Protection  
3833 SALA Way  
Red Wing, MN 55066 USA

Phone 800.328.6146  
Email [3mfallprotection@mmm.com](mailto:3mfallprotection@mmm.com)  
Web [3M.com/FallProtection](https://www.3m.com/FallProtection)

3M, DBI-SALA and Flexiguard are trademarks of 3M.  
Please recycle. Printed in USA.  
© 3M 2022. All rights reserved. 70-0717-3962-0