



Fall Protection

Step up to freestanding accessibility.

3M™ DBI-SALA® Flexiguard™ Freestanding Access Ladder System

The Freestanding Access Ladder System (FSALS) is a mobile and versatile solution designed to be positioned manually or with the use of a tow bar (optional) and service vehicle. An adjustable height integrated ladder provides safe access and egress from elevated work surfaces with integrated anchor points supporting up to two workers simultaneously. Adjustable platform height provides the ability to serve a multitude of applications.



Features:


- ▶ System contains two fall arrest posts, each rated for one user.
- ▶ User weight: 310 lbs. (141 kg) or less.
- ▶ Manual height adjustment via winch assembly to allow for multiple height adjustment ranges.
- ▶ All systems include a fall arrest bar for accessing ladder.
- ▶ System includes heavy-duty leveling jacks.
- ▶ Includes 6' (1.8m) working platform with foam bottom and collapsible guardrail handles.

Target Applications:



Transportation


- ▶ Aviation (Aircraft maintenance)

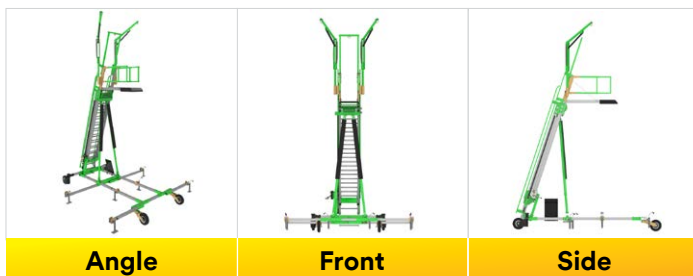

Complies with EN795:2012 | CEN/TS 16415:2013.

Conforms to the requirements of 29 CFR OSHA 1910.140 | 29 CFR OSHA 1926.502

For use in Canada, please review applicable provincial regulations.

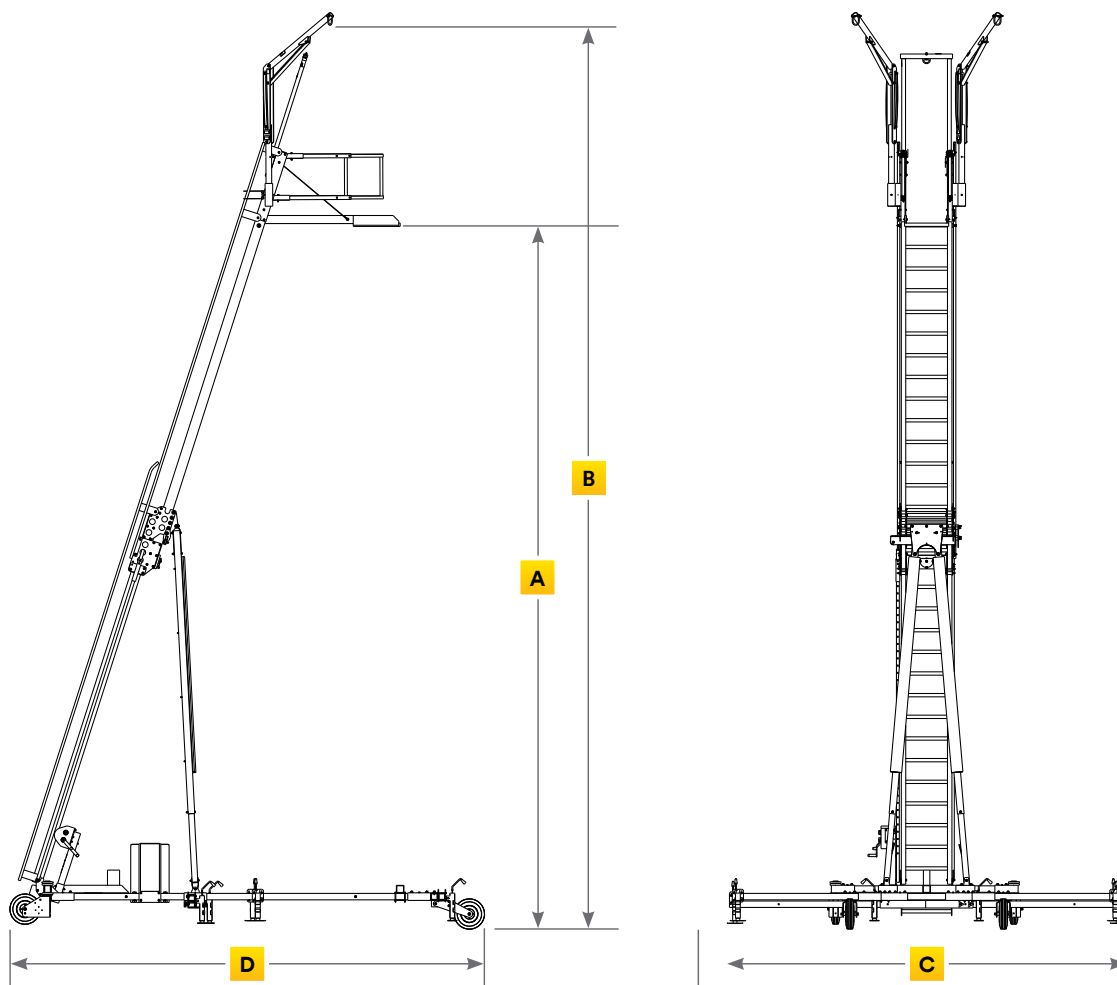

Free-Standing Access Ladder Models								
SKU	Global Standard	Weight	"A" Platform Height	"B" Anchor Height	"C" Base Length	"D" Overall Length	OSHA/ANSI SRL Rating	CE SRL Rating
8567715	* OSHA / CE	2,056 lbs 933 kg	10' 8"–15' 8" (3.2m–4.8m)	19' 7"–24' 6" (6.0m–7.5m)	12' 4" (3.8m)	12' 10" (3.9m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8567717	* OSHA / CE	2,206 lbs (1001 kg)	14' 5"–23' 2" (4.4m–7.1m)	23' 4"–32' 1" (7.1m–9.8m)	14' 4" (4.4m)	17' (5.2)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)
8567719	* OSHA / CE	2,850 lbs (1293 kg)	18' 4"–30' 10" (5.6m–9.4m)	27' 2"–39' 9" (8.3m–12.1m)	17' 4" (5.3m)	20' 10" (6.35m)	≤ 1,350 lb. (6 kN) MAF & ≤ 900 lb. (4 kN) AAF	≤ 1,350 lb. (6 kN)

* Complies with EN795:2012 | CEN/TS 16415:2013.

Accessories



8518240
Equips the system with a tow bar and pintle eye connection.



8526761
Tow bar storage pocket.



8547277
Grounding reel and bracket kit.



3M Fall Protection
3833 SALA Way
Red Wing, MN 55066 USA

Phone 800.328.6146
Email 3mfallprotection@mmm.com
Web 3M.com/FallProtection

**Find complete product information
at 3M.com/FallProtection.**

3M, DBI-SALA and Flexiguard are trademarks of 3M.
Please recycle. Printed in USA.
© 3M 2022. All rights reserved. 70-0717-3966-1